


TECHNICAL INFORMATION FOR

---

# REVERSE THREAD DRYWALL SCREWS

---

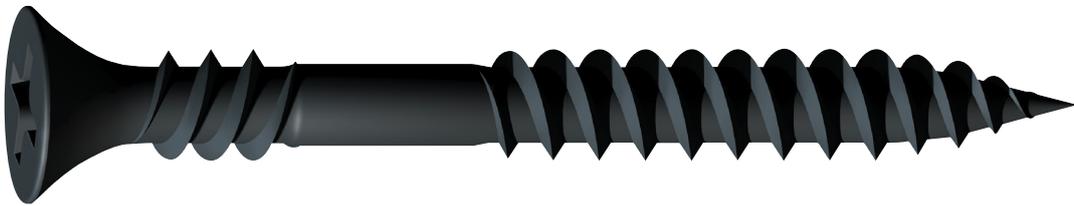

TECHNICAL DATA SHEET

## DRYWALL SCREWS - REVERSE THREAD



- For fastening dense/thick drywall to drywall track (0.7mm) and timber
- Bugle head
- Made from C10-18 steel
- 25° Super sharp point for ease of penetration



PHILLIPS



EN 14566:2008



BLACK PHOS.



PLASTERBOARD



THIN METAL

### FEATURES



- Phillips No.2 recess for a positive drive.
- Bugle head to reduce tearing of the board surface.
- 25° 'Super Sharp' point for ease of penetration.
- Reverse thread under the head to assist countersinking in hard/dense boards.
- 60° twinthread offers excellent pull out values and insertion speed.
- Plated in a Black Phosphate to withstand over 50hrs salt spray, in accordance with ASTM B117-11.
- Manufactured from a hardened durable C1018 carbon steel, offering excellent strength and ductility.
- Full batch traceability.




On rare occasions the use of black phosphate screws may result in staining or damage to the finished surface.

### PRODUCT RANGE


BLACK PHOS.

Product Code	Size (mm)	Box Qty	Carton Qty (Box)	Carton Qty	Pallet Qty (Box)	Pallet Qty
00025DRYR	3.9 x 25	1,000	16	16,000	384	384,000
00038DRYR	3.9 x 38	1,000	12	12,000	288	288,000
00042DRYR	3.9 x 42	1,000	9	9,000	216	216,000

### INSTALLATION GUIDELINES

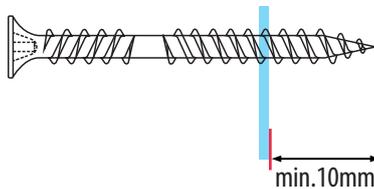

In order to guarantee a secure fixing, the screw must fully penetrate and protrude through the back of the steel by a minimum of 10mm

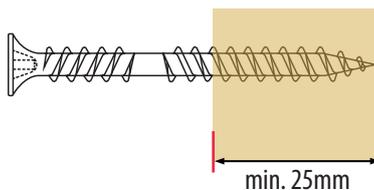

In order to guarantee a secure fixing, the screw must fully penetrate any supporting timber by a minimum of 25mm

### DIMENSIONS

Product Code	DK (mm)	L (mm)	d (mm)	D (mm)	TB (mm)	TF (mm)
00025DRYR	6.75	25.0	2.30	3.50	2.95	13.75
00038DRYR	6.75	38.0	2.30	3.50	4.50	20
00042DRYR	6.75	42.0	2.30	3.50	4.50	20.0

\*all figures stated are approximate and for reference only.

DK	Head Diameter
L	Length
TB	Thread Length (Reverse)
TF	Thread Length (Right)
d	Minor diameter
D	Major Diameter

