


TECHNICAL INFORMATION FOR


SOLO COACH SCREWS



TECHNICAL DATA SHEET

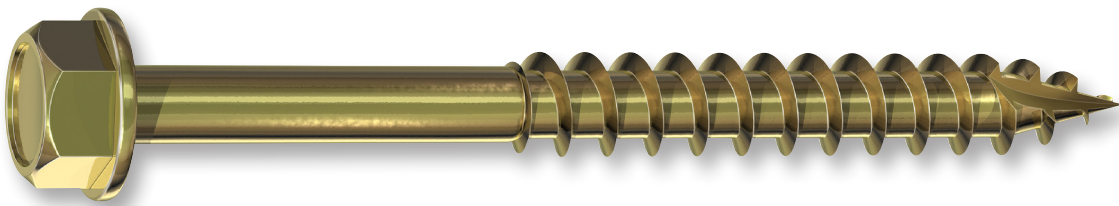

SOLO COACH SCREW

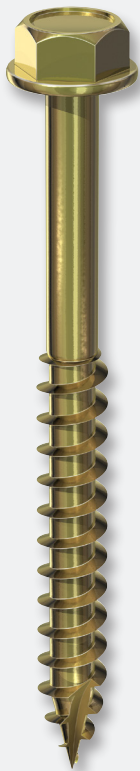

FEATURES

- Hex head for quick and easy installation.
- Compatible with impact tools in high torque applications.
- Large fixed washer to assist clamping and reduce head pull through.
- Partially threaded for improved clamping ability.
- Single deep thread for excellent thread engagement.
- Zinc & yellow passivated for enhanced corrosion resistance.
- Type 17 slash point to reduce torque and help prevent splitting.
- Socket driver included.


PRODUCT RANGE

Product Code	Size (mm)	Socket Size (mm)	Fixed Washer Dia. (mm)	Box Qty
625SCSY	6 x 25	8	12.6	100
640SCSY	6 x 40	8	12.6	100
650SCSY	6 x 50	8	12.6	100
660SCSY	6 x 60	8	12.6	100
670SCSY	6 x 70	8	12.6	100
680SCSY	6 x 80	8	12.6	100
6100SCSY	6 x 100	8	12.6	100
840SCSY	8 x 40	10	14.6	50
850SCSY	8 x 50	10	14.6	50
860SCSY	8 x 60	10	14.6	50
870SCSY	8 x 70	10	14.6	50
880SCSY	8 x 80	10	14.6	50
8100SCSY	8 x 100	10	14.6	50
8120SCSY	8 x 120	10	14.6	50
1040SCSY	10 x 40	13	17.5	50
1050SCSY	10 x 50	13	17.5	50
1060SCSY	10 x 60	13	17.5	50
1070SCSY	10 x 70	13	17.5	50
1080SCSY	10 x 80	13	17.5	50
10100SCSY	10 x 100	13	17.5	50
10130SCSY	10 x 130	13	17.5	50
10160SCSY	10 x 160	13	17.5	50
1280SCSY	12 x 80	16	22	25
12100SCSY	12 x 100	16	22	25
12130SCSY	12 x 130	16	22	25
12160SCSY	12 x 160	16	22	25

DIMENSIONAL DATA

Product Code	D (mm)	L Size (mm)	LT (mm)	H (mm)	B (mm)	A (mm)
625SCSY	6.0	25	15	5.0	12.0	8.0
640SCSY	6.0	40	24	5.0	12.0	8.0
650SCSY	6.0	50	30	5.0	12.0	8.0
660SCSY	6.0	60	36	5.0	12.0	8.0
670SCSY	6.0	70	42	5.0	12.0	8.0
680SCSY	6.0	80	48	5.0	12.0	8.0
6100SCSY	6.0	100	60	5.0	12.0	8.0
840SCSY	8.0	40	24	6.2	14.0	10.0
850SCSY	8.0	50	30	6.2	14.0	10.0
860SCSY	8.0	60	36	6.2	14.0	10.0
870SCSY	8.0	70	42	6.2	14.0	10.0
880SCSY	8.0	80	48	6.2	14.0	10.0
8100SCSY	8.0	100	60	6.2	14.0	10.0
8120SCSY	8.0	120	72	6.2	14.0	10.0
1040SCSY	10.0	40	24	7.8	17.0	13.0
1050SCSY	10.0	50	30	7.8	17.0	13.0
1060SCSY	10.0	60	36	7.8	17.0	13.0
1070SCSY	10.0	70	42	7.8	17.0	13.0
1080SCSY	10.0	80	48	7.8	17.0	13.0
10100SCSY	10.0	100	60	7.8	17.0	13.0
10130SCSY	10.0	130	78	7.8	17.0	13.0
10160SCSY	10.0	160	96	7.8	17.0	13.0
1280SCSY	12.0	80	48	7.8	21.5	13.0
12100SCSY	12.0	100	60	9.0	21.5	16.0
12130SCSY	12.0	130	78	9.0	21.5	16.0
12160SCSY	12.0	160	96	9.0	21.5	16.0

*all figures stated are approximate and for reference only.

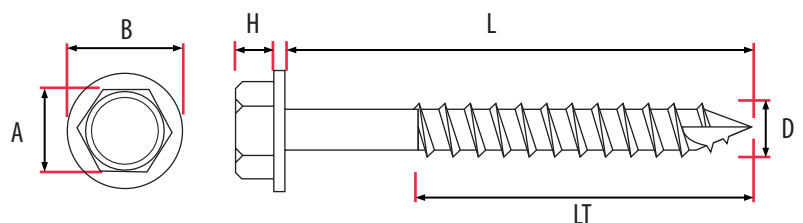

D	Diameter
L	Length
LT	Thread length

H	Head depth
B	Washer diameter
A	Across flats