

Softwood Decking



A range of high quality softwood decking. Precision machining achieves an accurate profile. The decking is high pressure treated creating a product that is resilient to the elements.



Features and Benefits



Pressure preservative treatment protecting against rot, decay and insect attack with an additional wax additive to provide a water repellent coating.



Our decking is manufactured from slow-grown imported redwood which enhances stability compared to faster growing timber from the UK & Ireland. Kiln dried to +/- 18% helps reduce splits or twists.

Environmental

We hold both PEFC and FSC Chain of Custody certificates. We hold a duty to ensure the preservation of our global forest resource for the benefit of future generations.

MBM Forest Products Ltd


MBM House, 34 Berth, Tilbury Dock, Tilbury, Essex RM18 7DP United Kingdom

Tel: 01375 856745 Fax: 01375 855412 Email: mbmsales@mbmfp.co.uk


Softwood Decking Specification

Product Specification	
Dimensions (mm)	32 x 125 (28 x 120) & 32 x 150 (28 x 145)
Species	European Redwood
Botanical Name	Pinus Sylvestris
Origin	Northern Europe
Description	Dual Decking Board Grooved 1 Side / Smooth 1 Side
Product Properties	High Pressure Treated / Precision Finish / Kiln Dried
Certification	FSC / PEFC
Stock Sizes	32 x 125 (3.6m, 4.2m & 4.8m) 32 x 150 (3.6m, 4.2m & 4.8m)

32 x 150 Profile and Dimensions

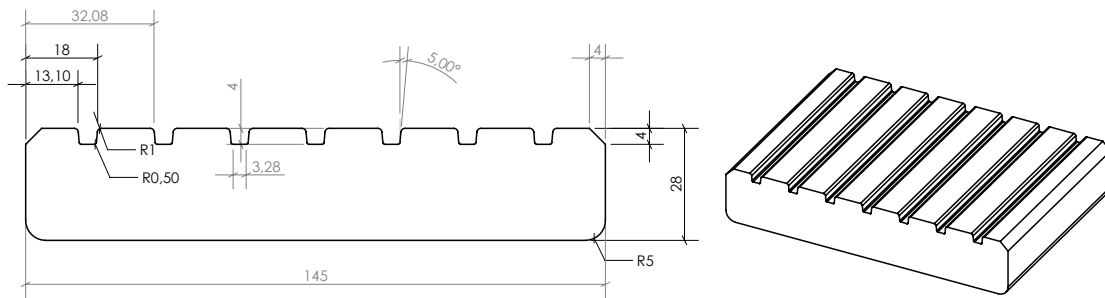

32 x 125 Profile and Dimensions

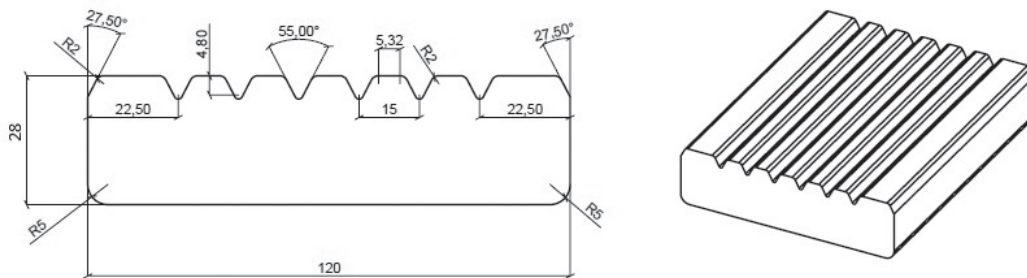

MBM Forest Products Ltd

MBM House, 34 Berth, Tilbury Dock, Tilbury, Essex RM18 7DP United Kingdom

Tel: 01375 856745 Fax: 01375 855412 Email: mbmsales@mbmfp.co.uk

