

## Angle Brackets

### Application and Design Features

The Sabrefix range of angle brackets are designed to accommodate most situations which require a 90 degree connection.

### Fixing Instructions


Use 3.75x30mm sherardised square twisted nails or suitable bolts

### Material Specification

Galvanised mild steel

Product Code	Description	H	L	W	Thickness	Maximum Fixing Combinations		
						Nail hole	8mm Bolt hole	10mm bolt Hole
HRC	Hand rail Bracket	35	25	30	2.0mm	4	0	0
AB050X050	Angle Brackets 050 X 050	50	50	60	2.0mm	14	0	2
AB060X040	Angle Brackets 060 X 040	60	40	60	2.5mm	17	0	2
AB060X060	Angle Brackets 060 X 060	60	60	40	2.5mm	10	0	0
AB090X090	Angle Brackets 090 X 090	90	90	63	2.5mm	16	4	2
AB150X090	Angle Brackets 150 X 090	150	90	63	2.5mm	19	6	5
AB150X150	Angle Brackets 150 X 150	150	150	63	2.5mm	20	6	2

Product Code	Description	A	B	C	Fixing Nails	Safe Working Loads per pair (kN)		
						Load Direction	Long Term	Med' Term
AB090X090	Angle Brackets 090 X 090	90	90	63	16	A	2.71	3.09
AB090X091	Angle Brackets 090 X 091	90	90	63	16	B	5.81	6.64
AB090X092	Angle Brackets 090 X 092	90	90	63	16	C	4.76	5.44

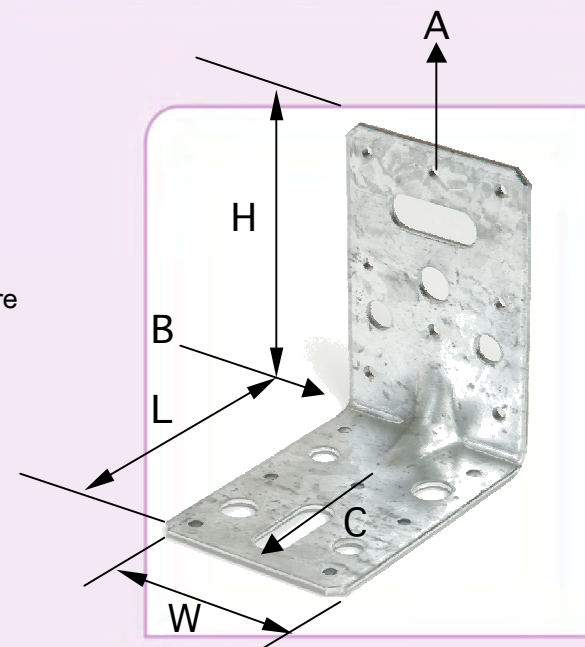

Issue February 2005



Sabrefix Threpton Road Industrial Estate, Watton, Norfolk IP25 6NG  
 T: 01953 883919 F: 01953 884229 E:sales@sabrefix.co.uk © Sabrefix

